



P.C. MOUNTING

SWITCH FUNCTION	POS. 1	POS. 2	POS. 3
ON	OFF	ON	
2-1, 5-4	OPEN	2-3, 5-6	




NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- PLATING MATERIAL: SILVER
- CONTACT RATING: 2A @ 250VAC
5A @ 120VAC OR 28VDC
- ELECTRIC LIFE: 30,000 ACTUATIONS AT FULL LOAD.
- INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
- DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
- OPERATING TEMP.: -30°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.
- 2002/95/EC (ROHS) COMPLIANT
- CONTACT RESISTANCE: 10 mΩ OHM MAX. INITIAL @ 2-4 VDC
- 100mA FOR BOTH SILVER AND GOLD PLATING



ISOMETRIC

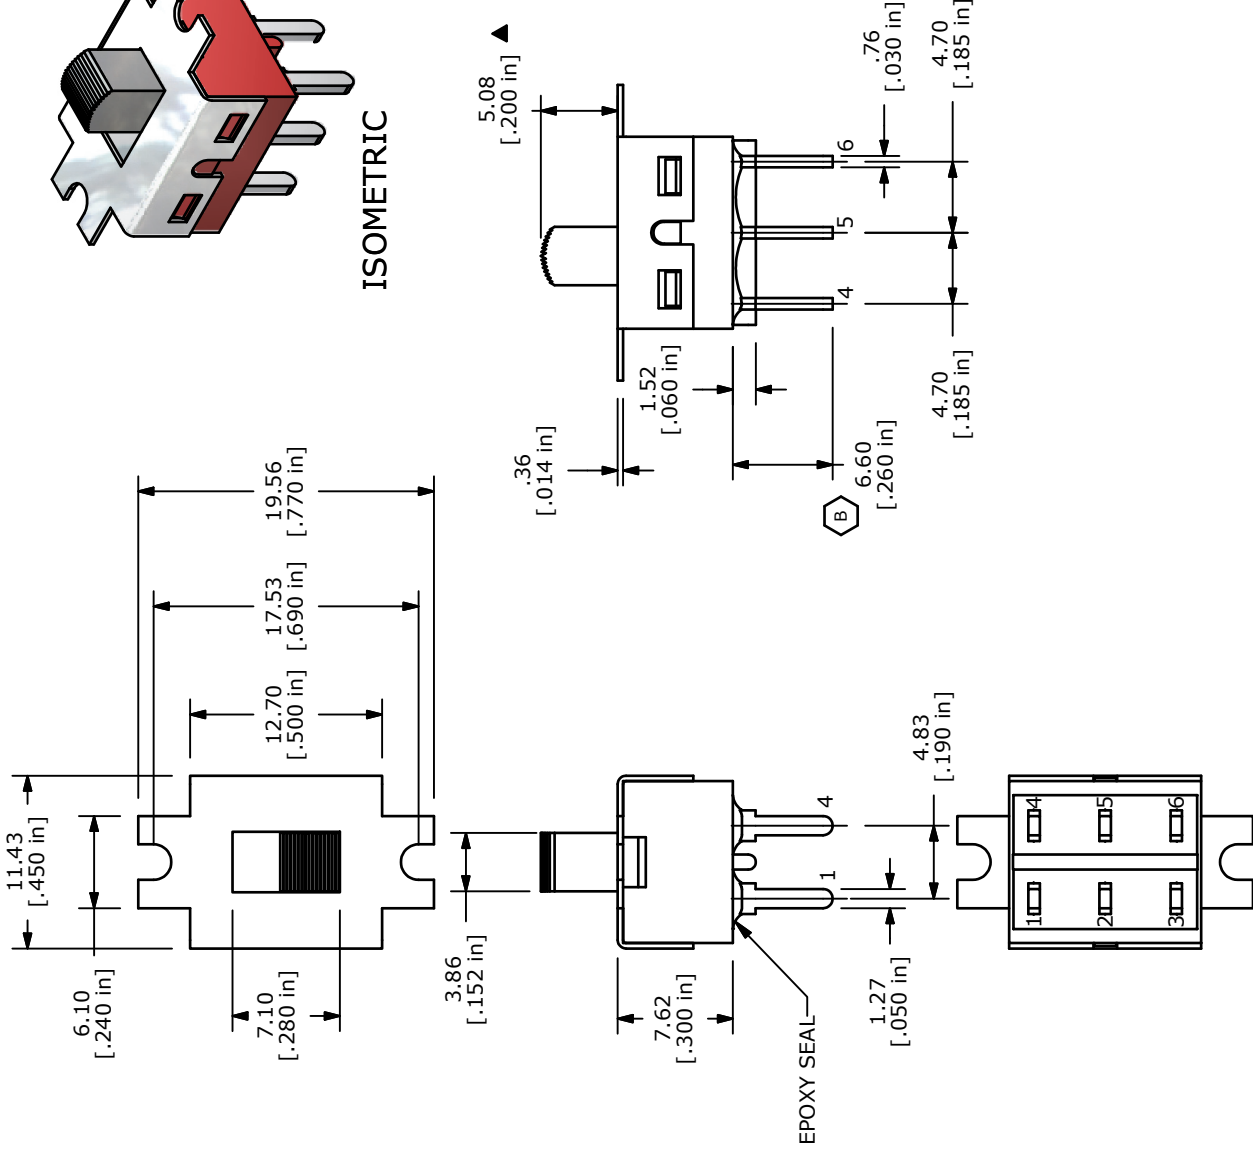

TITLE 500SDP3S1M2QEA

B	19565	DRAWING UPDATE	1/6/11	BGL
REV	PCR NO	DESCRIPTION	DATE	BY
<small>THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED</small>				

SCALE 2:1 DATE 1/6/2011 DR BGL DWG T521023 REV B